


High voltage cable

## High-voltage cable (HVC) 35mm<sup>2</sup> (200kA) (cooper) /CU/

CATALOG NO. : **AH39200**

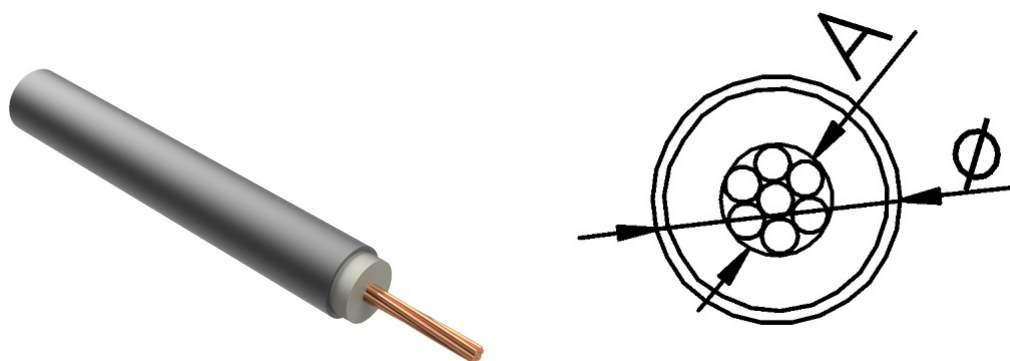

GTIN	5907675563920
Material	cross-linked polyethylene, copper
Diameter [mm]	18.5
Section A [mm <sup>2</sup> ]	35
Insulating distance [mm]	750
Others	According to the SEP-BBJ certificate, it can withstand a current surge of 200kA and a voltage surge of 200kV. Dedicated product: head for the mast (catalog number AH39013), head (catalog number AH39003).

Due to continuous technical development, AH Hardt sp.j. reserves the right to introduce technical and technological changes of the products. The illustrations shown are not binding.