


Wall/structure-mounted masts

Insulated high-voltage cable mast fixed to the double standing seam h=1500mm

CATALOG NO. : **AH41241**

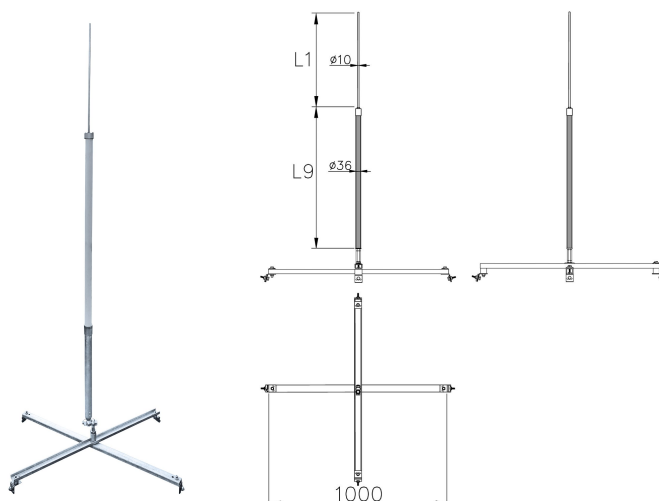

GTIN	5906764389137
Material	aluminum, fiberglass, galvanized steel
Round conductor/flat tape range [mm]:	Ø8-10
Height / lenght [mm]	1500
Diameter [mm]	Ø10-36
L1/L2/L3/L4/L5/L6/L7/L8/L9/L10/L11/L12 [mm]	500/.../.../.../.../.../1000/.../.../...
Wind zone	up to 950 m above sea level – maximum wind speed 30 m/s
Weight [kg]	5.2

Due to continuous technical development, AH Hardt sp.j. reserves the right to introduce technical and technological changes of the products. The illustrations shown are not binding.