


Free-standing masts isolated for high-voltage cable

Insulated free-standing mast with four-legged support for high-voltage cable h=8000mm

CATALOG NO. : **AH40581**

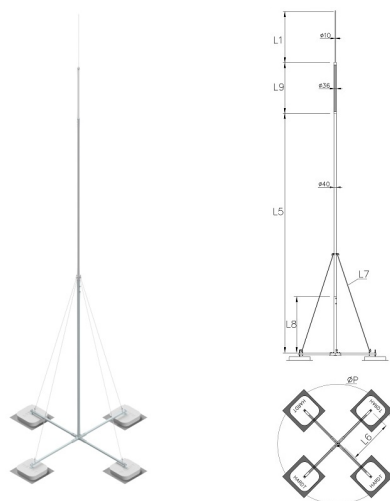

GTIN	5906764388826
Material	aluminum, fiberglass, galvanized steel, concrete, plastic
Height / lenght [mm]	8000
Diameter [mm]	Ø10-48
Installation diameter [mm]	2400
L1/L2/L3/L4/L5/L6/L7/L8/L9/L10/L11/L12 [mm]	1000/.../.../4000/1000/4000/3000/1000/.../.../...
Wind zone	up to 950 m above sea level – maximum wind speed 30 m/s
Concrete weight [kg]	4x24
Weight [kg]	134.7
Others	The high voltage cable and its mounting accessories are not included in the mast. The diagram of the installation of the high voltage cable can be found in the Assembly instruction No. 20: "Instructions for the installation of the high voltage cable for i

Due to continuous technical development, AH Hardt sp.j. reserves the right to introduce technical and technological changes of the products. The illustrations shown are not binding.